




CA3 Aux Potentiometer

Handlebar Mounted for On the Fly
Limit Adjustments with V3 Cycle Analyst

- Clamp onto a 7/8" handlebar tube
- Adjust any limit parameter on a V3 Cycle Analyst
- CNC'd Aluminum
- Waterproof

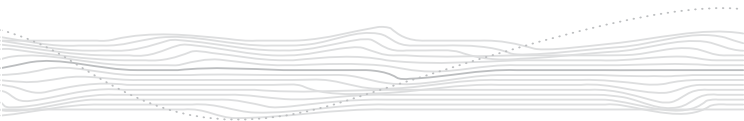



Grin Technologies
205-950 Powell Street
Vancouver, BC V6A 1H9

Designed and Assembled
in Canada by Grin
Technologies Ltd.

info@ebikes.ca
www.ebikes.ca

Part #: CA3_Aux_AI

To configure with V3.0 firmware, navigate to the "SETUP AUX POT" section of the setup menu and make the following changes:

Aux -> Function: Set this to "**Limits**"

Aux -> Limit: Choose **PAS Level, Amps, Power, or Speed Limit**

Aux -> Min Aux In: Set this to **0.10V**

Aux -> Max Aux In: Set this to **4.90V**

On the "SETUP AUX POT" preview screen, you should then see the voltage go from 0.0 - 4.99V as you turn the dial, and the corresponding limit percent go from 0% to 99%.

Specifications

Tube Diameter	22.2 mm (7/8")
Cable Length	50 cm
Connector	3-Pin Male JST-SM 1=5V, 2=Gnd, 3=Sig
Resistance	5 k Ω



Advancing the world of
ebike parts and accessories

www.ebikes.ca